2019 EDITION

EXHILARATING PERFORMANCE®

INDUSTRIAL EXHAUST SILENCER CATALOGUE

125-131 CHESTERVILLE
RD HIGHETT VIC 3190

WWW.EXOPERFORMANCE.COM.AU

T: 03 9555 0255

CRITICAL GRADE
25 TO 35 DB(A)

Features:
- High ambient noise level reduction
- 65 - 8000Hz attenuation
- Heavy duty mild steel precision welded
- Finished with high temperature resistant paint
- Low frequency attenuation
- Vertical or horizontal mounting
- Fuel saving
- Suitable for stationery and mobile applications
- Minimise back pressure
- Maximum operating temperature 600˚C

Options:
- Custom sizes and configurations
- Stainless steel or exotic materials
- With catalytic converter
- With spark arrestor
- With diesel particular filter
- Flanges to ANSI and DIN standards
- Lifting lugs, mounting brackets
- Explosion proof
- Thermal insulation blanket
- Special surface coatings

ATTENUATION GRAPH

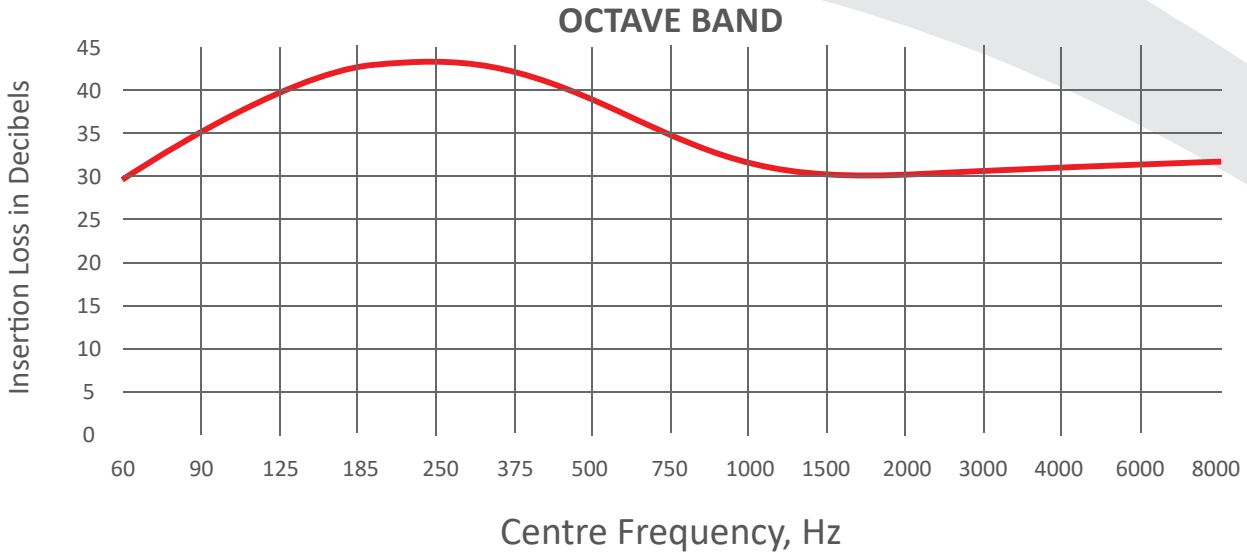

- dBA and catalyst reductions are nominal and may vary slightly depending on engine types and applications.
- Exo products are continually improved. Therefore, Exo reserves the right to change the product at any time without notice.

EXHILARATING PERFORMANCE®

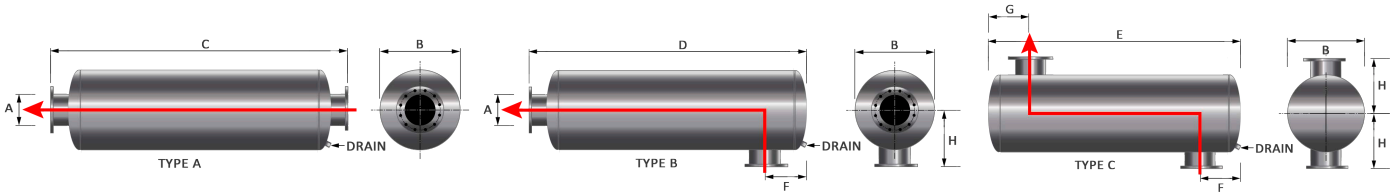

A Inlet Inch (NB)	B Dia	C O/L Type A	D O/L Type B	E O/L Type C	F Min	F Max	G Min	G Max	H Flange to centre	WT (kg)	Part Number
1.5” (38)	152	760	685	605	75	250	75	200	150	6	10025
2” (51)	203	785	710	630	100	225	100	200	125	10	10026
2.5” (64)	203	1040	960	885	100	355	100	300	175	14	10027
3” (76)	254	1065	990	910	125	355	125	300	200	18	10028
3.5” (89)	254	1370	1290	1210	125	530	125	430	200	24	10029
4” (102)	305	1395	1320	1240	150	530	150	405	250	30	10030
5” (127)	356	1545	1445	1345	175	580	175	455	275	40	10031
6” (152)	406	1850	1778	1675	200	735	200	555	300	58	10032
8” (203)	508	1900	1800	1700	225	735	225	555	355	98	10033
10”(254)	610	2510	2410	2335	275	1065	275	810	406	163	10034
12”(305)	711	2535	2460	2360	300	1040	300	785	455	230	10035
14”(356)	762	3450	3375	3300	355	1545	355	1165	480	363	10036
16”(406)	914	3530	3450	3350	405	1520	405	1140	555	443	10037
18”(457)	1067	3580	3500	3400	455	1495	455	1140	655	528	10038
20”(508)	1067	4165	4085	4010	480	860	480	530	655	621	10039
22”(559)	1219	4165	4085	4035	505	835	505	530	735	759	10040
24”(610)	1372	4215	4135	4089	580	1800	580	1370	810	870	10041

- Inlet sizes up to 30 inches available please call.
- Silencers from 6” and under are supplied with Expanded Tube Connections.
- Silencers from 8” and over are supplied with welded ANSI Flanges.